PRESSURE MULTIPLIERS **TYPE 100.40.10 RP**



APPLICATIONS:


Any application requiring the transfer of a capacity of oil determined in high pressure.


PNEUMATIC COMMAND

H/H' Opening G1/4 for version double effet (RP)
it is recommanded to choose the double effect when we look a stake in the rest frank.

HIGH PRESSURE HYDRAULIC

K opening (G1/4) intended mainly for the control (taken by pressure, Manometer, G Opening (G3/8) of power

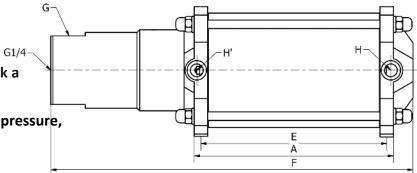



Model	Type of return		Duosuus Datio	Oil pressure		Oil flow per strocke		DIMENSIONS							
	RM	RP	Presure Ratio	8 bars	6 bars	cm3	Α	В	D	E	F	G	Н	J	K
100.40.10		х	1/6	48	36	125	203	118	120	172.5	335	G3/8	G1/4	50	M8x15

Under reserves of technical modifications

