
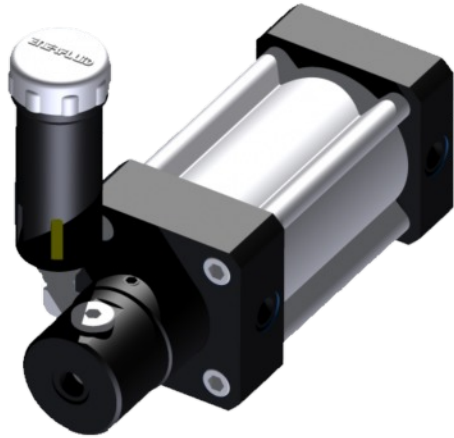


AIR/OIL PRESSURE MULTIPLIER TYPE 63



APPLICATIONS:

Any application requiring the transfer of a capacity of oil determined in high pressure.

PNEUMATIC COMMAND:

R/R' Opening G1/4 for version double effet (RP)


it is recommended to choose the double effect when we look a stake in the rest frank.

HIGH PRESSURE HYDRAULIC


Z opening (G1/4) intended mainly for the control (taken by pressure, Manometer, Z Opening (G1/4) of power

MAJORITIES:

Assembly in all the position with reservoir of compensation vertical or separated from multiplier.

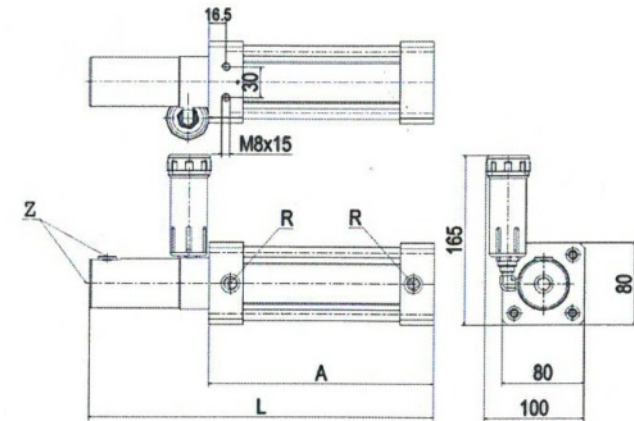

SYMBOL

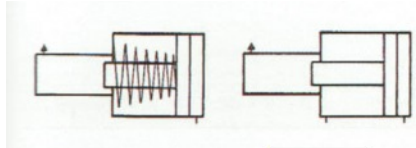

Model	Type of return		Pressure Ratio	Oil Pressure with air at		Oil flow cm3	Dimensions				
	RM	RP		8 bars	6 bars		A	L	Z	R	R'
63.14.05		X	1/20	160	120	6	161	227	G1/4	G1/4	G1/4
63.14.10		X	1/20	160	120	12	219	335			
63.16.05		X	1/15.5	124	93	10	161	227			
63.16.10		X	1/15.5	124	93	20	219	335			
63.20.05		X	1/10	80	60	15	161	227			
63.20.10		X	1/10	80	60	30	219	335			
63.22.05		X	1/8.2	65	49	19	161	227			
63.22.10		X	1/8.2	65	49	38	219	335			

Under reserves of technical modifications